

6


5

4


3

2

1

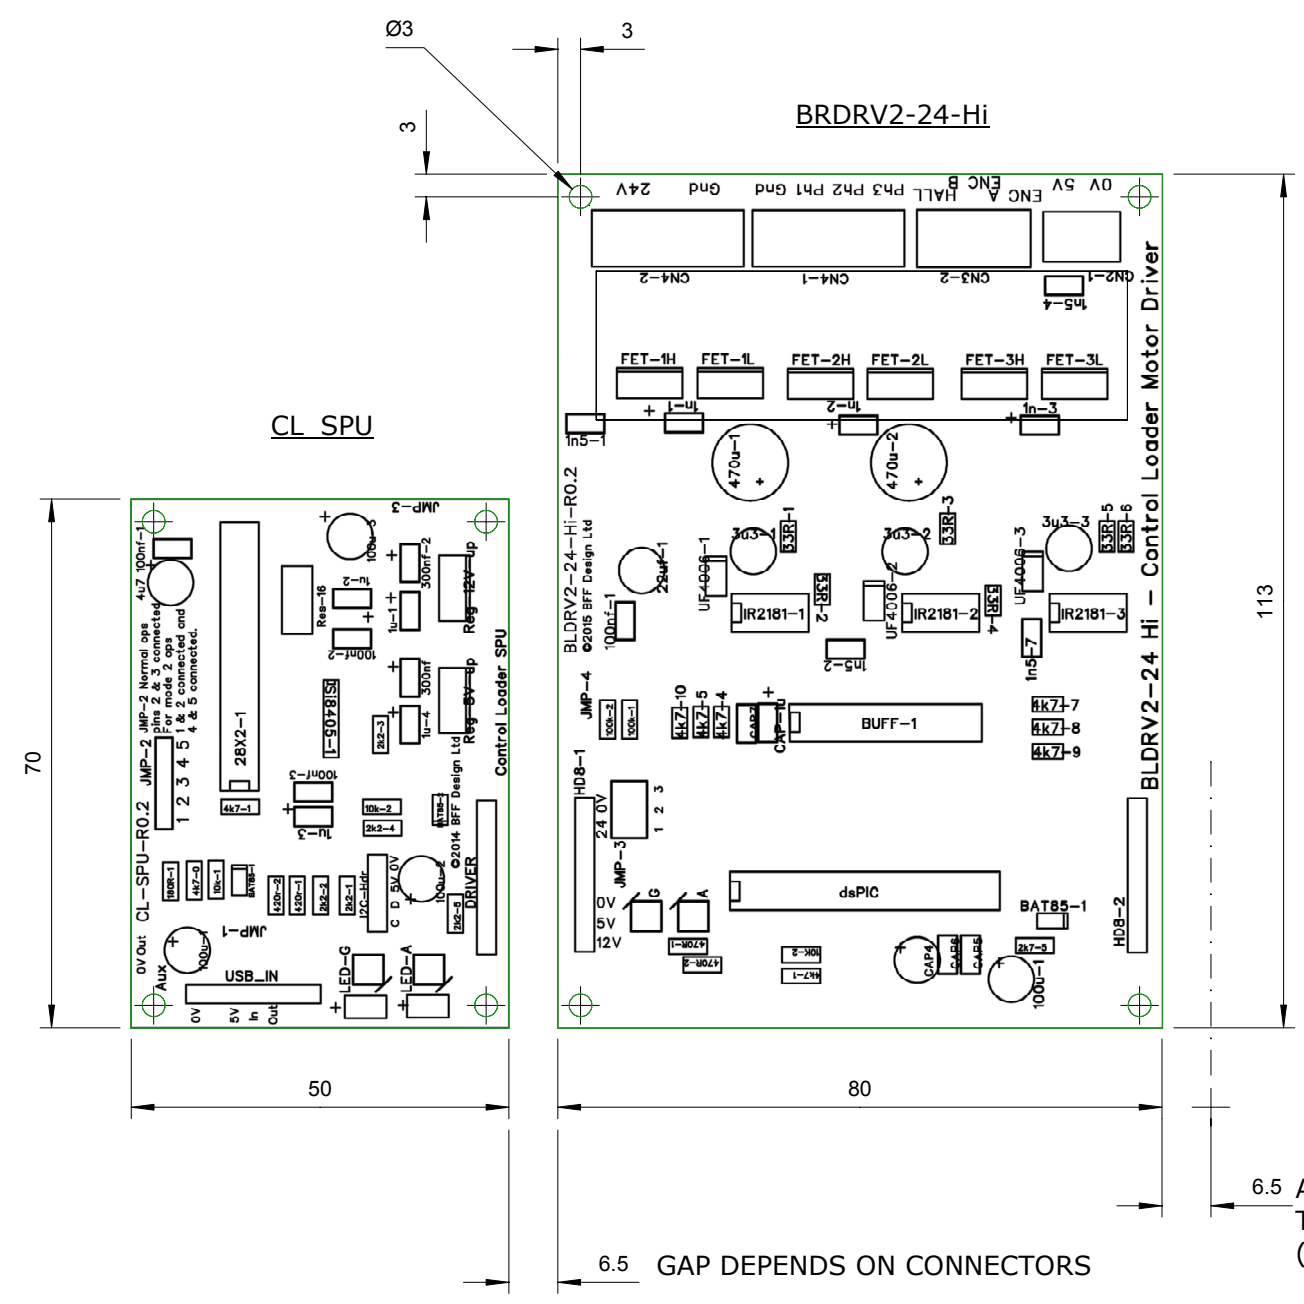

ALLOW APPROX 40MM CLEARANCE FOR HEATSINKS

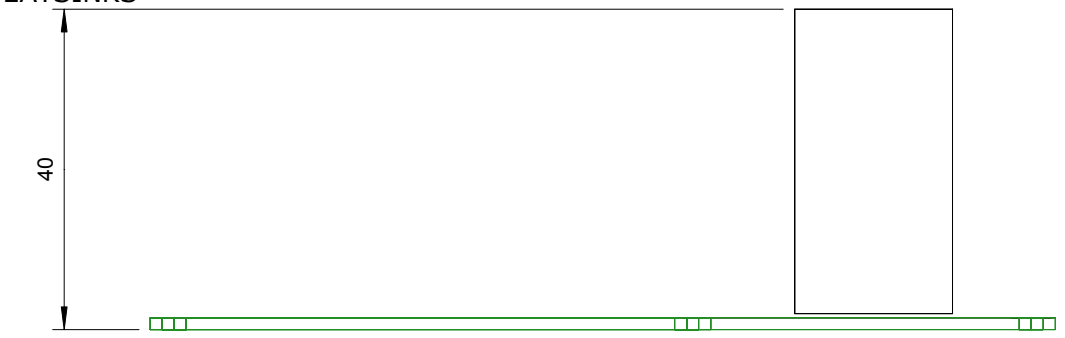

SIDE VIEW ON BLDRV2-24 Hi (COMPONENTS NOT SHOWN)

6.5 ALLOW GAP FOR CONNECTION TO ADJACENT CARD (CONNECTOR TYPE DEPENDENT)

6.5 GAP DEPENDS ON CONNECTORS

FOR STANDARD 2.54MM PIN MALE/FEMALE HEADER CONNECTORS GAP IS AS SHOWN

NOTES

- ONE BLDRV2-24-Hi CARD SHOWN. UP TO 3 CARDS CAN BE DRIVEN BY A SINGLE CL_SPU.
- GAP BETWEEN CARDS DEPENDS ON CHOICE ON INTER-PCB CONNECTOR TYPE.
- ALLOW APPROX 3MM CLEARANCE BELOW CARDS FOR THROUGH HOLE COMPONENT LEADS AND SOLDER.

© 2015 BFF Design Ltd. Conditions of use apply. See - bffsimulation.com

TITLE **CL_SPU + BLDRV2-12-Hi PRELIMINARY OUTLINES**

SIZE	CAGE CODE	DWG NO	REV
A3	IH 11/15	BLDRV2-S001	1
SCALE	1:1	MM	SHEET SHT 1 OF 1

6

5

4

3

2

1